

## CDM-150L, Industrial Dehumidifier.

The CDM-150L Industrial Dehumidifier comes with a Soft Key Control Panel that allows you to choose your desired humidity level and extraction rate. It has Rotary compressor with environment friendly R410a refrigerant. CDM-50L has pneumatic type strong wheel and movable handle for ease of movement. It has drain hose to connect pipe for continuous drainage.



Model: CDM-150L

### Power Consumption

Max 1495 Watts

### Voltage

220V, 50 Hz 1Ph

### Extraction (30°C, 80% RH)

150 Liters / day

### Humidity Setting

Available

### Running Temperature

5 - 38°C

### Compressor

Rotary

### Coolant

R410A

### Noise Level (approx.)

55 dBA

### Weight

55 kg

### Dimension (W x D x H) mm

690 x 530 x 985

### Air Flow

1500 CMH.

### Protections


Delay start protection, IPX21

### Automatic defrost & Hose connection

Available

### Handle

Fixed Handle

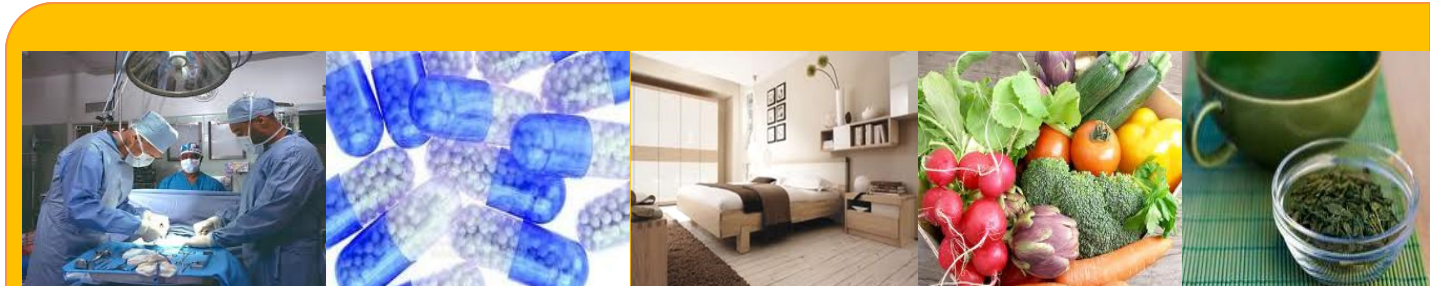



## CDM-150L, Industrial Dehumidifier.



Model: CDM-150L

