

CDM-50L, Industrial Dehumidifier.

The CDM-50L Industrial Dehumidifier comes with a Soft Key Control Panel that allows you to choose your desired humidity level and extraction rate. It has Rotary compressor with environment friendly R410a refrigerant. CDM-50L has pneumatic type strong wheel and movable handle for ease of movement. It has drain hose to connect pipe for continuous drainage.



Model: CDM-50L

Power Consumption

Max 745 Watts

Voltage

220-240V, 50/60 Hz 1Ph

Extraction (30°C, 80% RH)

50 Liters / day

Humidity Setting

Available

Running Temperature

5 - 38°C

Compressor

Rotary

Coolant

R410a

Noise Level (approx.)

≥ 54 db

Weight

32 kg

Dimension (W x D x H) mm

550 x 400 x 750

Air Flow

360 CMH.

Condensate Tank Capacity

8 tank

Wheel Size

Back: Φ 160 mm, Front: Φ 30 mm

Handle


Fixed Handle



CDM-50L, Industrial Dehumidifier.



Ctrltech[®]
Power, Cooling & Monitoring

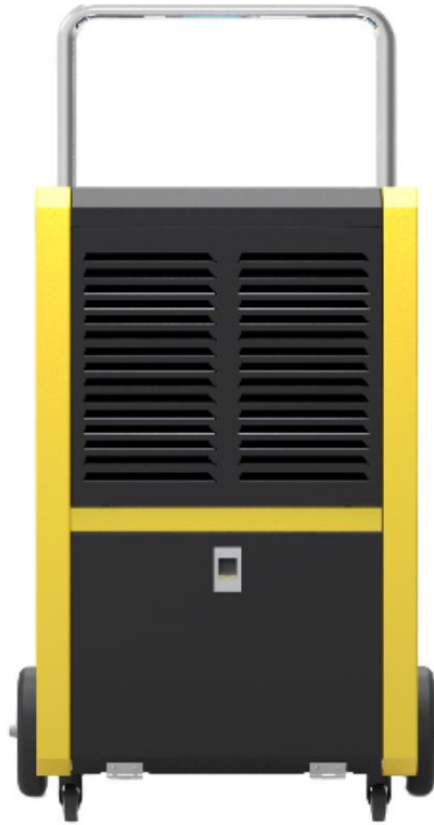

Model: CDM-50L

